



TX760 | COMMERCIAL-INDUSTRIAL SECTIONAL OVERHEAD DOORS

The Complete Solution for Quality, Versatility and Energy Efficiency

The Thermalex Series from Upwardor is a line of sectional overhead doors specifically designed for commercial and industrial applications. They're built to last and their superior quality provides high-levels of thermal efficiency, making them the ideal choice for any sectional overhead door application.

Key Features & Benefits

- Designed for commercial and industrial applications
- Environmentally friendly CFC/HCFC free foamed-in-place polyurethane insulation provides maximum R-value of 27.7 excellent energy efficiency and are LEED compliant
- Constructed from the highest-quality materials, delivers remarkable performance and durability
- Thermal break behind tongue chemically sealed and bonded
- Sections are fully cuttable; perfect for slab programs
- Design options available on some models for wind loads up to 130 mph (209 km/h)



CONTACT US FOR MORE INFORMATION
613-955-7755 | INFO@ENCOREGDS.COM



Thickness Product Type	3" (76.2mm) Insulated Foamed -in-place	2" (50.8mm) Insulated Foamed -in-place	1-3/4" (44.5mm) Insulated Foamed -in-place	1-1/2" (38.1mm) Insulated Foamed -in-place
Upwardor Model #	Thermalux TX760	Thermalux TX500	Thermalux TX450	Thermalux TX380
Paint/Delamination Warranty (Finish/ cracking/rust through)	10 Year Limited	10 Year Limited	10 Year Limited	5 Year Limited
Hardware/Spring Warranty	1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited
Insulation Type/ Foam Process	Polyurethane/ Continuous	Polyurethane/ Continuous	Polyurethane/ Continuous	Polyurethane/ Continuous
R-value (Calculated)	27.7	18.4	16.3	14.1
Thermal Break (Between exterior & interiors skins)	Chemically Bonded & Sealed	Chemically Bonded & sealed	Chemically Bonded & sealed	Chemically Bonded & sealed
Section Joint	Tongue and Groove	Tongue and Groove	Tongue and Groove	Shiplap
Gauge Steel Skin (G60 Steel: exterior)	26/26	26/26	20/26	26/26
Hinge Plate (Reinforcement Strip)	Two Continuous 3" 20ga Strip	Two Continuous 1-1/4" 20ga Strip	Two Continuous 1-1/4" 20ga Strip	Single Continuous 1-1/4" 20ga Strip
End Stiles (20ga are standard)	20ga or 16ga Galvanized	20ga or 16ga Galvanized	20ga or 16ga Galvanized	20ga Galvanized
Colours Available (Interior always white)	White/Black New Brown/Steel Grey	White/Black New Brown/Steel Grey	White/Black New Brown/Steel Grey	White/Black New Brown/Steel Grey
Panel Appearance (Texture)	Micro Groove (Stucco Embossed)	UDC Groove (Stucco Embossed)	UDC Groove (Stucco Embossed)	UDC Groove (Stucco Embossed)

WINDOW INSERTS



MODEL U100
Closed door

MODEL R112G
With insulated
windows

WINDOWS AVAILABLE: 18" x 8", 24" x 12" and 34" x 16"

COLOUR OPTIONS




WHITE

BLACK

STEEL GREY

NEW BROWN

ACTUAL DOOR COLOUR WILL VARY FROM COLOUR RENDITIONS

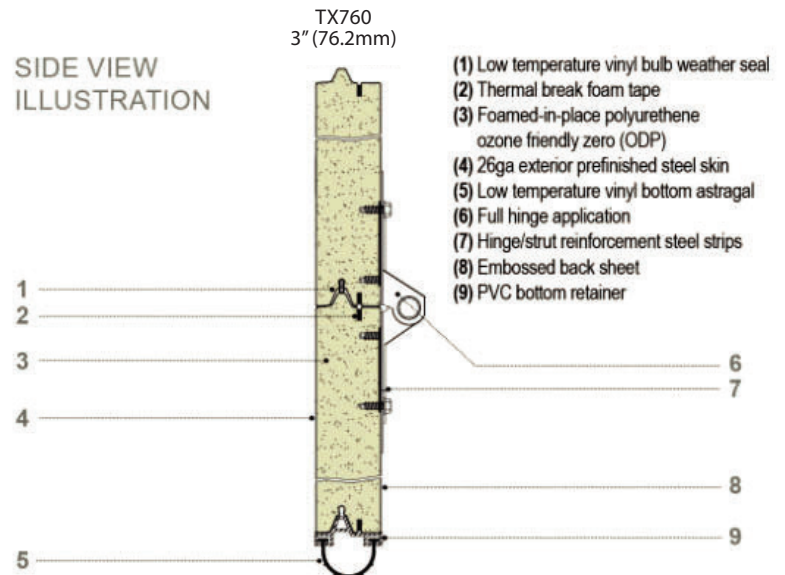

**Please refer to website for most up to date information. Website data will supersede printed literature.*



CONTACT US FOR MORE INFORMATION
613-955-7755 | INFO@ENCOREGDS.COM

